

Artikel Nr.: 843278

Netzgerät, BASIC, DIM, CV, EUP40D-1W24V-0












IP20 CE

Elektrische Daten

Betriebsart	spannungskonstant	Eingangsspannung	110-240V AC/50-60Hz
Leistung	40,00 W	Leistungsfaktor	0,9
Ausgangsspannung	24V DC	Anschlußmöglichkeit	Klemme
Ausgangsstrom	0-1700 mA		

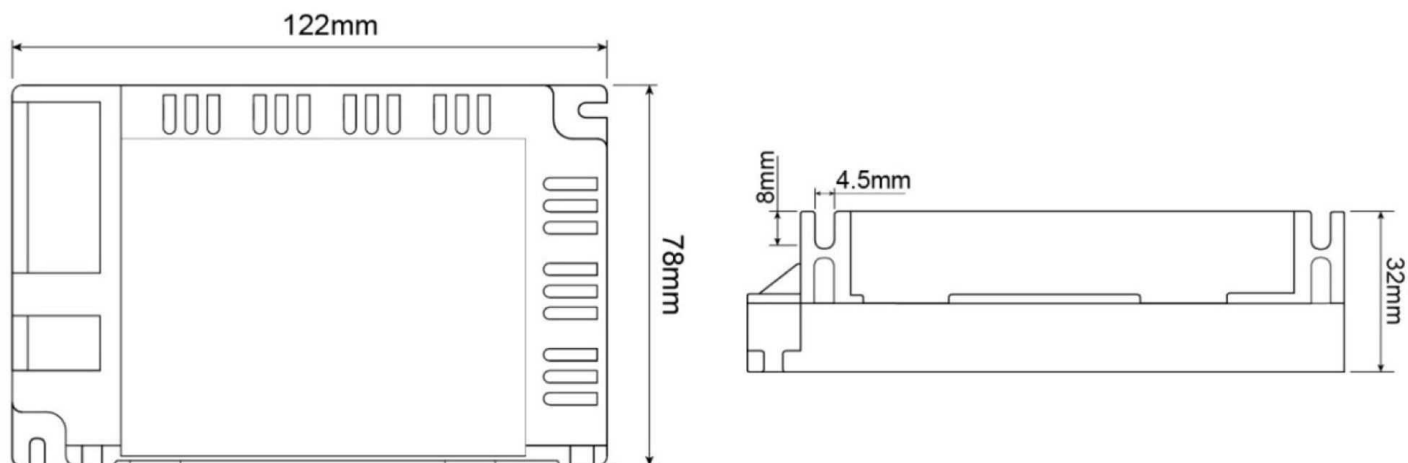
Produkteigenschaften

	Schutzklasse II		Überspannungsschutz
SELV	Schutzkleinspannung		Lampenbetriebsgerät 110
	Kurzschlußfest		Möbeleinbau nicht geeignet
	Überlastschutz	ErP	Standby-Stromverbrauch < 0,5 W
	Übertemperaturschutz	LVD	Sicherheit nach EN 61347
	Sicherheitstrafo	EMC	Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
	dimmbar - DALI-Bus nach IEC 62386 DALI 1.0 / Push	EMC	Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 843278

Netzgerät, BASIC, DIM, CV, EUP40D-1W24V-0

**Abmessungen und Gewicht****Grenzwerte**

Länge	122,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	78,00 mm	Gehäusetemperatur	0 °C
Höhe	32,00 mm	max. Menge Sicherungsautomaten	B10A=8, B16A=14, C10A=18, C16A=29
Durchmesser	0,00 mm	max. Einschaltstrom	20A/350µs
Gewicht	196 g	kapazitive Last	

Article No.: 843278

Power supply unit, BASIC, DIM, CV, EUP40D-1W24V-0













IP20 CE

Electrical Characteristics

Operating mode	constant voltage	Input voltage	110-240V AC/50-60Hz
Power	40,00 W	Power factor	0,9
Output voltage	24V DC	Connection possibility	clamp
Output current	0-1700 mA		

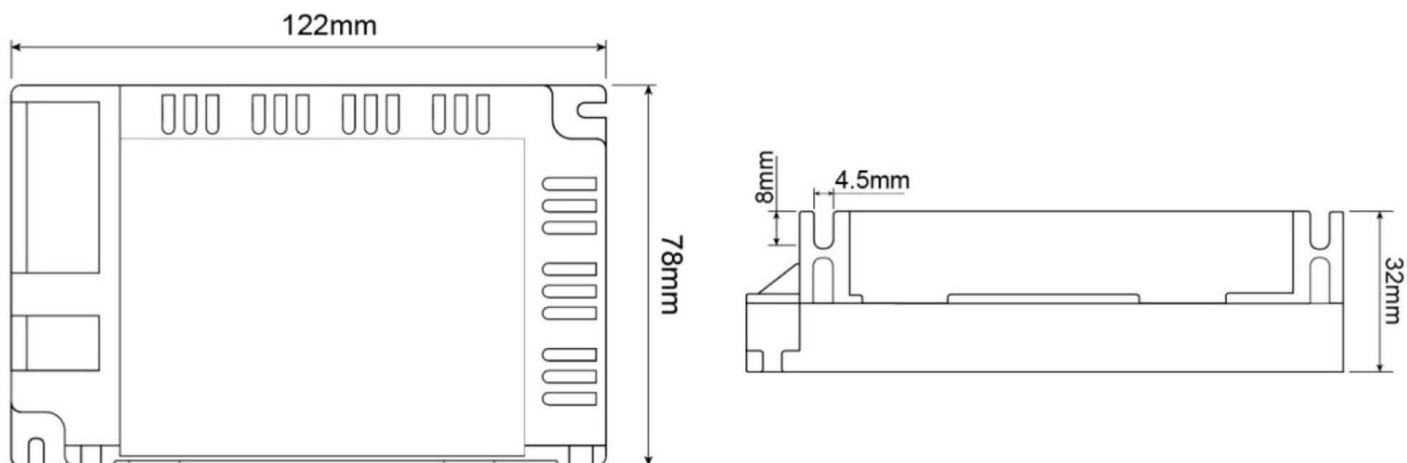
Product features

 Protection class II	 Overvoltage protection
 Low voltage protection	 Lamp control gear 110
 Short circuit protection	 Not suitable for furniture installation
 Overload protection	ErP Standby-power consumption < 0,5 W
 Overheating protection	LVD Safety according to EN 61347
 Safety transformer	EMC Interference suppression + immunity according to EN 55015 + EN 61547
 dimmable - DALI-Bus according to IEC 62386 DALI 1.0 / Push	EMC Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 843278

Power supply unit, BASIC, DIM, CV, EUP40D-1W24V-0

**Dimensions & Weight****Absolute maximum ratings**

Length	122,00 mm	Operating temperature	-20°C - +50°C
Width	78,00 mm	Case temperature	0 °C
Height	32,00 mm	max. amount of circuit breakers	B10A=8, B16A=14, C10A=18, C16A=29
Diameter	0,00 mm	max. inrush current	20A/350µs
Product weight	196 g	capacitive load	