

Artikel Nr.: 872029

Netzgerät, MINI, CV, 24V/4W



IP65 CE

Elektrische Daten

| | | | |
|------------------|-------------------|---------------------|---------------------|
| Betriebsart | spannungskonstant | Eingangsspannung | 100-240V AC/50-60Hz |
| Leistung | 4,00 W | Leistungsfaktor | 0,4 |
| Ausgangsspannung | 24V DC | Anschlußmöglichkeit | offene Kabel |
| Ausgangsstrom | 0-170 mA | | |

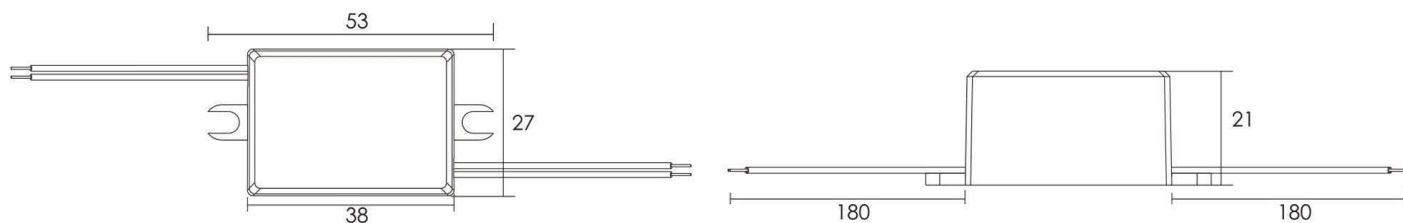
Produkteigenschaften

| | | | |
|------|----------------------|-----|--|
| | Schutzklasse II | | Überspannungsschutz |
| SELV | Schutzkleinspannung | | Lampenbetriebsgerät 110 |
| | Kurzschlußfest | | Möbeleinbau geeignet |
| | Überlastschutz | ErP | Standby-Stromverbrauch < 0,5 W |
| | Übertemperaturschutz | LVD | Sicherheit nach EN 61347 |
| | Sicherheitstrafo | EMC | Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547 |
| | nicht dimmbar | EMC | Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3 |

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 872029

Netzgerät, MINI, CV, 24V/4W

**Abmessungen und Gewicht****Grenzwerte**

| | | | |
|-------------|----------|-----------------------------------|---------------------------------------|
| Länge | 53,00 mm | Betriebstemperatur | -20°C - +50°C |
| Breite | 27,00 mm | Gehäusetemperatur | 80 °C |
| Höhe | 21,00 mm | max. Menge Sicherungsautomaten | B10A=17, B16A=28, C10A=37, C16A=59 |
| Durchmesser | 0,00 mm | max. Einschaltstrom | 11A/300µs |
| Gewicht | 40 g | kapazitive Last | 19,75pF |

Article No.: 872029

Power supply unit, MINI, CV, 24V/4W












IP65 CE

Electrical Characteristics

| | | | |
|----------------|------------------|------------------------|---------------------|
| Operating mode | constant voltage | Input voltage | 100-240V AC/50-60Hz |
| Power | 4,00 W | Power factor | 0,4 |
| Output voltage | 24V DC | Connection possibility | wire with open ends |
| Output current | 0-170 mA | | |

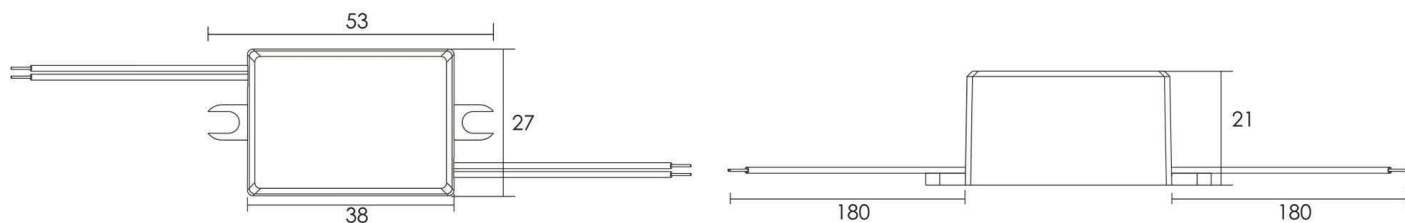
Product features

| | | | |
|---|--------------------------|---|--|
|  | Protection class II |  | Overvoltage protection |
| SELV | Low voltage protection |  | Lamp control gear 110 |
|  | Short circuit protection |  | Suitable for furniture installation |
|  | Overload protection | ErP | Standby-power consumption < 0,5 W |
|  | Overheating protection | LVD | Safety according to EN 61347 |
|  | Safety transformer | EMC | Interference suppression + immunity according to EN 55015 + EN 61547 |
|  | not dimmable | EMC | Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3 |

Black fields are applicable / gray fields are not applicable

Article No.: 872029

Power supply unit, MINI, CV, 24V/4W

**Dimensions & Weight****Absolute maximum ratings**

| | | | |
|----------------|----------|---------------------------------|------------------------------------|
| Length | 53,00 mm | Operating temperature | -20°C - +50°C |
| Width | 27,00 mm | Case temperature | 80 °C |
| Height | 21,00 mm | max. amount of circuit breakers | B10A=17, B16A=28, C10A=37, C16A=59 |
| Diameter | 0,00 mm | max. inrush current | 11A/300µs |
| Product weight | 40 g | capacitive load | 19,75pF |