

**Artikel Nr.: 872648**

Netzgerät, IP, CV, PLUTO 200/12V



**IP67 CE**

**Elektrische Daten**

Betriebsart	spannungskonstant	Eingangsspannung	100-240V AC/50-60Hz
Leistung	200,00 W	Leistungsfaktor	0,91
Ausgangsspannung	12V DC	Anschlußmöglichkeit	offene Kabel
Ausgangsstrom	0-16600 mA		

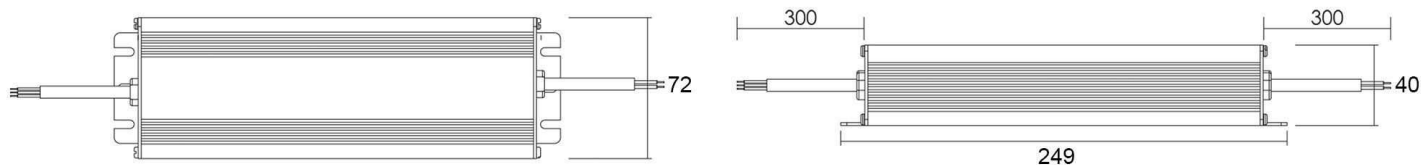
**Produkteigenschaften**

Schutzklasse I	Überspannungsschutz
<b>SELV</b> Schutzkleinspannung	Lampenbetriebsgerät 110
Kurzschlußfest	Möbeleinbau geeignet
Überlastschutz	<b>ErP</b> Standby-Stromverbrauch < 0,5 W
Übertemperaturschutz	<b>LVD</b> Sicherheit nach EN 61347
Sicherheitstrafo	<b>EMC</b> Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
nicht dimmbar	<b>EMC</b> Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

**Artikel Nr.: 872648**

Netzgerät, IP, CV, PLUTO 200/12V

**Abmessungen und Gewicht****Grenzwerte**

Länge	249,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	72,00 mm	Gehäusetemperatur	75 °C
Höhe	40,00 mm	max. Menge Sicherungsautomaten	B10A=2, B16A=4, C10A=4, C16A=8
Durchmesser	0,00 mm	max. Einschaltstrom	75A/300µs
Gewicht	1220 g	kapazitive Last	1,32uF

Article No.: 872648

Power supply unit, IP, CV, PLUTO 200/12V












IP67 CE

### Electrical Characteristics

Operating mode	constant voltage	Input voltage	100-240V AC/50-60Hz
Power	200,00 W	Power factor	0,91
Output voltage	12V DC	Connection possibility	wire with open ends
Output current	0-16600 mA		

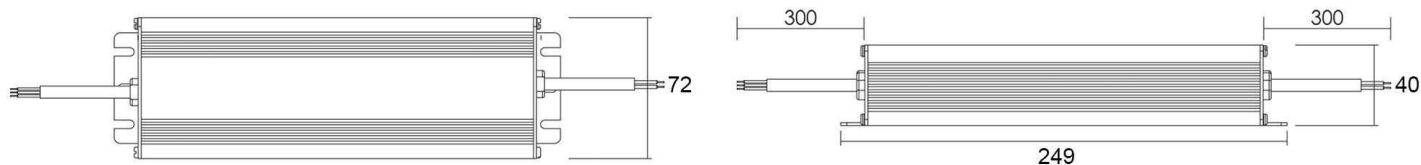
### Product features

 Protection class I	 Overvoltage protection
SELV Low voltage protection	 Lamp control gear 110
 Short circuit protection	 Suitable for furniture installation
 Overload protection	ErP Standby-power consumption < 0,5 W
 Overheating protection	LVD Safety according to EN 61347
 Safety transformer	EMC Interference suppression + immunity according to EN 55015 + EN 61547
 not dimmable	EMC Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

**Article No.: 872648**

Power supply unit, IP, CV, PLUTO 200/12V

**Dimensions & Weight****Absolute maximum ratings**

Length	249,00 mm	Operating temperature	-20°C - +50°C
Width	72,00 mm	Case temperature	75 °C
Height	40,00 mm	max. amount of circuit breakers	B10A=2, B16A=4, C10A=4, C16A=8
Diameter	0,00 mm	max. inrush current	75A/300µs
Product weight	1220 g	capacitive load	1,32uF